



Size and weight

Height:	19.35 inches (49.1 cm)
Width:	25.7 inches (65 cm)
Depth (with stand):	8.15 inches (20.7 cm)
Weight:	23.5 pounds (10.7 kg)

System Requirements

Mac with Mini DisplayPort connector

Mac OS X v10.6.4 or later

The LED Cinema Display is designed with the following features to reduce its environmental impact:

- Arsenic-free display glass
- Mercury-free
- BFR-free
- PVC-free
- Highly recyclable aluminum and glass enclosure
- Meets ENERGY STAR 5.0 requirements
- Rated EPEAT Gold*

Display

27-inch (diagonal viewable image size) thin film transistor (TFT) active-matrix liquid crystal display with in-plane switching (IPS).

Supported resolutions: 2560 by 1440 pixels, 1920 by 1080 pixels, 1280 by 720 pixels

Colors (maximum): 16.7 million

Aspect ratio: 16:9

Viewing angle: 178° horizontal; 178° vertical

Brightness (typical): 375 cd/m²

Contrast ratio (typical): 1000:1

Response time (typical): 12 ms

Audio and video

Camera and microphone:
Built-in iSight with microphone



Speakers: Built-in 2.1 speaker system (49 watts maximum)

Mini DisplayPort connector with audio support

Limited warranty and service

Your Apple display comes with 90 days of free telephone support and a one-year limited warranty. To extend your service and support to three full years, you may register one display in the AppleCare Protection Plan when you purchase the display at the same time as a Mac Pro, MacBook Pro, or Mac mini. To cover an individual display or second display, purchase the AppleCare Protection Plan for Apple Display. Only the AppleCare Protection Plan provides you with direct telephone support from Apple technical experts and the assurance that repairs will be handled by Apple-authorized


Peripherals and cables

Three self-powered USB 2.0 ports

Kensington security slot

One cable with three connectors: Mini DisplayPort with audio support, universal MagSafe (up to 85W), USB 2.0

AC power cord

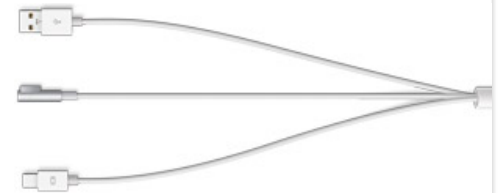

Electrical and operating requirements

- Input voltage: 100V to 240V AC; 50–60Hz
- Maximum power: 250W (LED Cinema Display while charging MacBook Pro)
- Energy saver mode: 1W or less

Environmental requirements

- Operating temperature: 50° to 95° F (10° to 35° C)
- Storage temperature: -4° to 116° F (-20° to 47° C)
- Operating humidity: 20% to 80% noncondensing
- Maximum operating altitude: 10,000 feet

Additional Options

technicians using genuine Apple parts. For more information, visit [Apple Support](#) or call 800-823-2775.

- VESA Mount Adapter Kit
- AppleCare Protection Plan

What's in the box

- LED Cinema Display
- AC power cord
- Printed documentation



* 27-inch LED Cinema Display achieved a Gold rating from EPEAT in the U.S., Canada, France, Germany, and the UK.